



GuardTech Pest Management, Inc.
6550 Concord Rd.
Beaumont, TX 77708
409-813-2290

Service Inspection Report

INVOICE #: 222613

WORK DATE: 03/18/2026

BILL-TO 115459

Steve Megas
1716 AVENUE E
NEDERLAND, TX 77627-5234

Phone: 409-626-2509
Mobile: 409-626-2509

LOCATION 115459

Steve Megas
1716 AVENUE E
NEDERLAND, TX 77627-5234

Phone: 409-626-2509
Mobile: 409-626-2509

Time In: 03/18/2026 09:36:24 AM

Time Out: 03/18/2026 12:28:08 PM

Customer Signature

Customer Unavailable to Sign

Technician Signature

Jared VanZandt

License #: 0872454

Purchase Order	Terms	Service Description	Quantity
None	NET 30	Termite Bait Station Refill	1.00

GENERAL COMMENTS / INSTRUCTIONS

We will install 12 Trelona® Termite Bait Stations around your home to provide continuous termite protection.
2 gallons bath trap one gallon shower pan drilled trenched and rodded.sticker on water heater there was no power here had to use my personal generator to drill holes.house is being demoed for future remodeling why there is no power.plugged and patched holes after chemicals rodding the holes.

CONDITIONS / OBSERVATIONS	Reported	Severity	Responsibility	Reviewed
---------------------------	----------	----------	----------------	----------

None Noted.

PRODUCTS APPLICATION SUMMARY

Material	Lot #	EPA #	A.I. %	A.I. Conc.	Active Ingredient	Finished Qty	Undiluted Qty
Taurus SC		53883-279	0.0600%	0.0600	Fipronil	93.0000 Gallon	5.5800 Fluid Ounce
Target Pests: Termites							
Material	Lot #	EPA #	A.I. %	A.I. Conc.	Active Ingredient	Finished Qty	Undiluted Qty
Trelona Termite Bait Stations		499-557	0.5000%	n/a	Novaluron	8.0000 Each	
Target Pests: Termites							

PEST ACTIVITY	# Areas	# Devices	Pest Totals
---------------	---------	-----------	-------------

None Noted.

DEVICE INSPECTION SUMMARY

AREA COMMENTS

None Noted.



GuardTech Pest Management, Inc.
6550 Concord Rd.
Beaumont, TX 77708
409-813-2290

Service Inspection Report

INVOICE #: 222613

WORK DATE: 03/18/2026

DEVICE INSPECTION EXCEPTIONS

None Noted.

INSPECTION DETAIL

None Noted.

PRODUCTS APPLIED

Material EPA #	A.I. % A.I. Concentration	Finished Qty Undiluted Qty	Application Equipment Application Method	Time Lot #
Taurus SC 53883-279	0.0600% 0.06000000	3.0000 Gallon 0.1800 Fluid Ounce	Compressed Air Sprayer Applying material with a sprayer	10:57:28 AM
Target Pests: Termites				
Taurus SC 53883-279	0.0600% 0.06000000	90.0000 Gallon 5.4000 Fluid Ounce	Compressed Air Sprayer Applying material with a sprayer	10:57:52 AM
Target Pests: Termites				
Trelona Termite Bait Stations 499-557	0.5000% n/a	8.0000 Each	Bait Device Bait Stations	11:37:11 AM
Target Pests: Termites				



Steve Megas
1716 AVENUE E
NEDERLAND, TX 77627-5234

Steve Megas
1716 AVENUE E
NEDERLAND, TX 77627-5234

Invoice # 222613

Invoice Date: 03/18/2026
Wednesday

Time: 09:36 AM

Time In/Out: 09:36 AM - 12:28 PM

Bill-To: 115459

Location: 115459

Technician: Jared VanZandt
Lic:0872454

Service Description**Quantity****Price**

Termite Bait Station Refill

1.00

\$1,323.00

SUBTOTAL \$1,323.00

TAX \$109.15

AMT PAID \$0.00

TOTAL \$1,432.15



TECHNICIAN SIGNATURE

AMOUNT DUE \$1,432.15

Payment Receipt. Please Return with Payment Remittance

Bill-To: Steve Megas
1716 AVENUE E
NEDERLAND, TX 77627-5234

Account #: 115459

Date: 03/18/2026

PO Number:

Invoice #: 222613

Technician: Jared VanZandt

Amount Paid: _____

Check No.: _____

emit-To: GuardTech Pest Management, Inc.
6550 Concord Rd.
Beaumont, TX 77708
409-813-2290



TDA TPCL# 0568409

Pest Management*"Guarding & Improving Quality of Life"*

www.guardtechpest.com

ULTRAGUARD TERMITE AGREEMENT

Prepared By:

Patrick Nichols

patrick@guardtechpest.com

6550 Concord Road, Beaumont, TX 77708

(409) 813-2290

CUSTOMER	CUSTOMER NAME Steve Megas		ACCOUNT NUMBER 115459	
	SERVICE ADDRESS 1716 AVENUE E	CITY NEDERLAND	STATE TX	ZIP CODE 77627-5234
	PHONE 409-626-2509	EMAIL gmegas@aol.com		

GUARDTECH PEST MANAGEMENT (the Contractor) agrees to control subterranean termites (*Reticulitermes*, *Heterotermes*, *Coptotermes* spp.) only in the property identified above.

NOTE: This agreement does NOT cover other WDI's (wood destroying insects) such as Drywood Termites, Beetles, Carpenter Ants, Carpenter Bees or other(s).

SERVICES	☒ UltraGuard Termite Protection UltraGuard Termite Protection includes soil spot treatment(s), interior treatment(s) at termite activity sites, bath trap accesses if applicable, and baited stations around exterior perimeter.	ADDITIONAL SERVICES ☐ Exterior Rodent Stations ☐ Fire Ant Control / Yard ☐ Snake Control ☐ Mosquito Fogging
	☐ UltraGuard Premium UltraGuard Premium includes UltraGuard Termite Protection + a quarterly (every 3 months) pest control service to include treatment to the exterior and interior (as needed) of the home for general pests + optional additional service(s).	

FEES	1. INITIAL PAYMENT \$ <u>1323.00</u> - \$ <u>0.00</u> (discount) + \$ <u>109.15</u> (tax) = \$ <u>1432.15</u>
	2. <u>11</u> ADDITIONAL PAYMENTS of \$ <u>24.00</u> + \$ <u>1.98</u> (tax) = \$ <u>25.98</u>
	Monthly Price Breakdown: \$ <u>24.00</u> (bait stations) + \$ <u>0.00</u> (UltraGuard basic) + \$ <u>0.00</u> (additional service) = \$ <u>24.00</u>

NOTES	We will install 12 Trelona® Termite Bait Stations around your home to provide continuous termite protection. This installation extends your termite warranty for as long as the maintenance of the stations remains current. We will also treat the whole exterior of home with Taurus Sc.
-------	--

A. SCOPE OF SERVICE: GuardTech Pest Management agrees to provide **Termite Protection** services at the above service address. Services include soil spot treatment(s), interior treatment(s) at termite activity sites, bath trap accesses if applicable,

Licensed and regulated by the Texas Department of Agriculture
P.O. Box 12847 Austin, TX 78711-2847 | Phone: (866) 918-4481 | Fax: (866) 232-2567

and baited stations around exterior perimeter. **UltraGuard Premium Customers:** GuardTech Pest Management agrees to provide exterior-focused pest control services at the above service address. Services include treatment of the exterior perimeter, foundation, eaves, windows, doors, and other accessible exterior areas as determined by the technician. This agreement covers common general household pests originating from the exterior, such as ants, roaches, spiders, earwigs, etc. Interior treatments are on an as-needed basis or by customer request only.

- B. CUSTOMER RESPONSIBILITIES:** Customer agrees to maintain landscaping, gutters, and exterior conditions to reduce pest harborage; ensure the property is accessible for inspections, treatments, and follow-up visits; notify GuardTech of structural changes, additions, foundation work, or major landscaping; minimize conducive conditions (e.g., leaks, poor drainage, direct wood-to-soil contact, excessive clutter, unsealed entry points); and promptly report pest activity to GuardTech.
- C. RIGHT OF ENTRY:** GuardTech and its representatives shall have the right to enter the property during normal business hours to perform inspections, treatments, or follow-up visits. Customer consent is granted by acceptance of this agreement.
- D. WARRANTY/GUARANTEE:** Warranty may be void if conducive conditions (e.g., leaks, high soil levels, debris) are not corrected. Suspended colonies caused by above-ground moisture are excluded. **UltraGuard Premium Customers:** If covered pests are observed indoors, GuardTech will provide interior treatment at no additional charge. Pests not listed in this agreement are not covered.
- E. EXISTING DAMAGE:** GuardTech Pest Management is not responsible for repairing existing structural damage, whether visible or hidden. Inspections may not reveal all pre-existing issues.
- F. MOISTURE & WATER LEAKAGE:** Leaks from plumbing, roofs, or exterior walls can create conditions favorable to termites and other pests. Such issues may void warranties unless corrected. GuardTech will notify customers in writing of observed issues; maintaining repairs is the customer's responsibility.
- G. WORKMANSHIP & PROPERTY CARE:** GuardTech will exercise reasonable care to avoid damage during treatment. Some soil, plants, or equipment may need to be moved for access. Customers must inform GuardTech in writing of any buried cables, pipes, or unusual conditions. If undisclosed and damaged during service, repairs will be the customer's responsibility.
- H. RELEASE AND INDEMNITY:** The customer releases GuardTech from claims arising from conditions not disclosed or corrected as required under this agreement.
- I. CLAIMS & DISPUTES:** All claims must be submitted in writing to our office before you make repairs. If you repair or alter items before we can inspect, coverage may be waived. Any disputes will be resolved by binding arbitration under the American Arbitration Association. The prevailing party will be awarded reasonable costs and fees, including attorney fees.
- J. LIMITATION OF LIABILITY:** GuardTech's liability is limited to the lesser of (1) the cost of repair, or (2) the amount paid for treatment. GuardTech is not responsible for termite damage itself, stains/discoloration, or plant/shrub damage during treatment, except in cases of gross negligence.
- K. PAYMENT TERMS:** Services are billed monthly at the agreed rate. Customers are required to have a payment method on file or prepay annually. Payments are charged on the agreed monthly date until cancellation, regardless of service frequency. Past due balances may result in service suspension or cancellation.
- L. TERM & CANCELLATION:** This agreement begins on the service start date and continues for a 12-month term, automatically renewing unless cancelled. Customers may cancel at any time by calling or providing written notice. GuardTech may cancel for non-payment, denial of access, or failure to correct conducive conditions. Either party may cancel without cause at the end of a yearly renewal term.
- M. COMPLIANCE:** GuardTech will perform all services in compliance with federal, state, and local laws, including regulations of the Texas Department of Agriculture and Environmental Protection Agency.
- N. ORAL STATEMENTS:** Only written terms in this agreement are binding. Verbal statements by employees or representatives are not warranties and should not be relied upon.
- O. FORCE MAJEURE:** GuardTech is not liable for delays or failure to perform services due to causes beyond its reasonable control, including natural disasters, extreme weather, pandemics, labor shortages, or government restrictions.
- P. TRANSFERABILITY:** This agreement applies only to the original property and customer. Upon sale of the property, service may be transferred to the new owner if requested in writing, subject to GuardTech's approval.
- Q. SEVERABILITY:** If any provision of this agreement is found to be invalid or unenforceable, the remaining provisions shall remain in full force and effect.
- R. GOVERNING LAW & VENUE:** This agreement shall be governed by the laws of the State of Texas. Any arbitration or legal action shall take place in the county where service was provided.
- S. CHEMICAL SENSITIVITY:** If you or any occupants are sensitive to pesticides, please notify us in writing before treatment. If necessary, we may discuss alternatives or decline service. Failure to notify us is considered your acceptance of risk.
- T. BAIT STATIONS:** Termite bait stations remain the property of GuardTech Pest Management and will be removed if service is terminated.
- U. PRICING:** Service fees are subject to annual price adjustments.
- V. ENTIRE AGREEMENT & AMENDMENTS:** This document constitutes the entire agreement between GuardTech and the customer. It may only be amended in writing and signed by both parties.

UNDER NO CIRCUMSTANCES SHALL THE CONTRACTOR BE LIABLE FOR, AND THE CLIENT EXPRESSLY RELEASES THE CONTRACTOR FROM OBLIGATIONS TO REPAIR ANY PAST, PRESENT, OR FUTURE DAMAGE CAUSED BY TERMITES, OTHER WOOD DESTROYING INSECTS, DECAY, OR ANY INCIDENTAL DAMAGES OR CONSEQUENTIAL DAMAGES, INCLUDING LOSS OF INCOME, LOSS OF TIME, LOSS OF SALES, LIABILITY TO THIRD PARTIES, OR ANY OTHER ECONOMIC LOSS, OR ANY OTHER COSTS OR EXPENSES, INCURRED BY CLIENT AS A RESULT OF SUCH DAMAGE.

My signature below attests that I have read and understand this agreement and that I agree to abide by all its terms and

conditions.

Client Signature: _____



Date: 03/09/2026

Contractor Signature: _____

Patrick Nichols

Date: 03/09/2026



CONSUMER INFORMATION SHEET

The structural pest control industry is regulated by the Texas Department of Agriculture (TDA), Structural Pest Control Service (SPCS), P.O. Box 12847, Austin, TX 78711-2847. TDA licenses the businesses, certified applicators technicians, and registers apprentices who perform structural pest control work. Certified applicators and technicians must pass a written examination in order to receive their licenses.

Pesticides must be registered with the United States Environmental Protection Agency (EPA) and TDA before they may be used in Texas. EPA registration is not a finding of product safety. Pesticides are designed to kill or control pests.

Your risk of harm depends upon the degree of your exposure and your individual susceptibility.

Specific health and safety information varies between pesticides and types of exposures and is available on the label information or SDS sheet, which can be supplied to you upon request from the licensed applicator. Take precautions when a treatment has been performed to avoid exposure to vulnerable individuals. Pesticides may be harmful if swallowed, inhaled, or absorbed through the skin. Avoid breathing dust or spray mist and any unnecessary contact with treated surfaces. If you desire specific information on precautions, refer to the pesticide label. The law requires that the application procedures specified on the label be followed.

If you have questions about the application, contact the business or person making the application. If you suspect a violation of the law regarding structural pest control, contact the SPCS. In case of a health emergency, seek immediate medical attention.

Pest Control signs must be posted prior to treatment in many instances. The signs should be posted in an area of common access at least 48 hours prior to treatment. The information sign will allow you to contact someone who can tell you what pesticide is being used.

If you are contracting for pest control services due to a home solicitation, you have the right to cancel the contract within 72 hours. You may exercise this right by notifying the pest control company that you do not wish to receive their service.

For general information on pesticides, contact the National Pesticide Information Center at 1-800-858-7378

For information concerning structural pest control laws, contact the Structural Pest Control Service at: 866-918-4481.

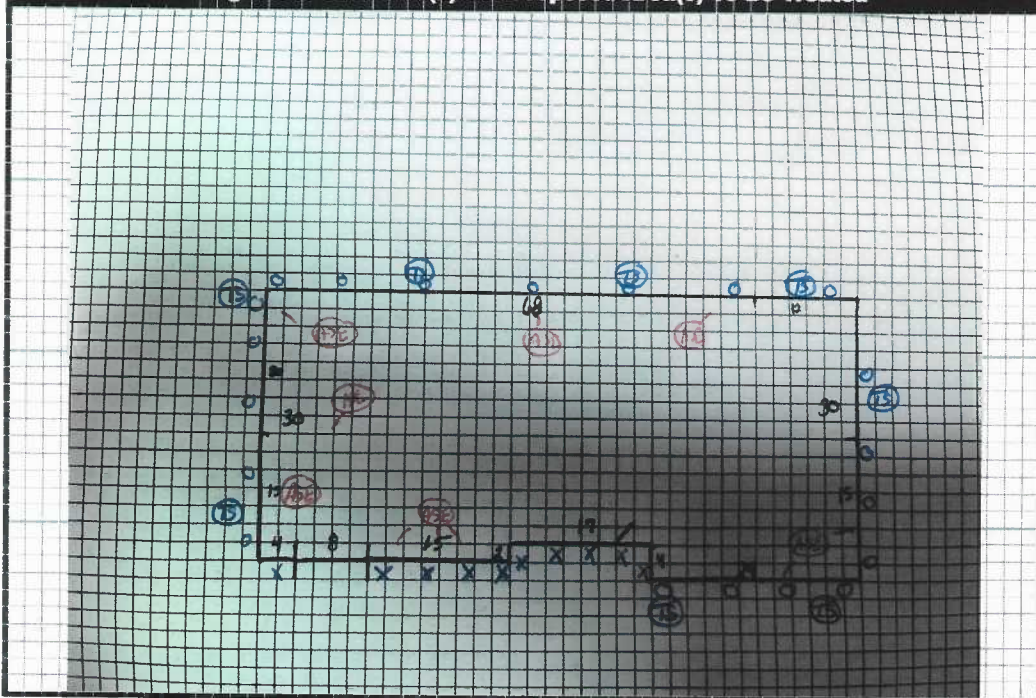
For information concerning the formulation and registration of pesticides, contact the TDA pesticide registration at (512) 463-7407 or 800-835-5832.

For non-emergency health information relating to pesticides, contact Texas Department of State Health Services (512) 458-7111.

REQUIRED BY THE TDA STRUCTURAL PEST CONTROL SERVICE

POST-CONSTRUCTION SUBTERRANEAN TERMITE, DRYWOOD TERMITE & RELATED WOOD DESTROYING INSECT TREATMENT DISCLOSURE DOCUMENT**PEST CONTROL COMPANY:**Name: GuardTech Pest ManagementTPCL# 11443Phone: 409-813-2290Address: 6550 Concord Rd.City: BeaumontState: TXZip Code: 77708**CUSTOMER:**Name / Contact: Steve MegasPhone: 409-626-2509Address to be Treated: 1716 AVENUE ECity: NEDERLANDState: TXZip Code: 77627-5234Email: gmegas@aol.comNotes: Active termites all thru home

This disclosure document is provided with each written estimate for treatment of subterranean termites, drywood termites, powder post beetles, wood boring beetles or other related wood destroying insects (excluding carpenter ants). For all treatments there will be a diagram showing exactly what will be treated. Treatment specifications and warranties for those treatments may vary widely. Review the pesticide label provided to you for minimum treatment specification. If you have any questions, contact the pest control company or the Texas Department of Agriculture, P.O. Box 12847, Austin, Texas 78711-2847. Phone (866) 918-4481

TARGET PEST(S):Subterranean termites**AREA(S) OF ACTIVITY:**Exterior and interior**AREA(S) TO BE TREATED:**Exterior Perimeter and bath trap**DISCLOSURE DATE & ESTIMATE DETAILS:**3/9/26**Diagram of Structure(s) and Proposed Area(s) To Be Treated****Key To Diagram Symbols**

Conditions Conducive for Infestation.....C
Evidence of Infestation.....E
Evidence of Active Infestation.....A
Evidence of Previous Infestation.....P
Evidence of Subterranean Termites.....S
Evidence of Formosan Termites.....F
Evidence of Wood Boring Beetles.....W
Evidence of Powder Post Beetles.....Y
Evidence of Drywood Termites.....D
Evidence of Other WDI:.....V
Areas to be Drilled.....X
Areas to be Trenched.....O
Area to be Rodded.....R
Area Bait Station to be Installed.....BS
Area Physical Barrier to be Installed.....BT

CONSTRUCTION TYPE:**FOUNDATION:**

- ☒ Slab
☐ Pier and Beam
Pier Type: _____
☐ Basement
☐ Other: _____

SIDING:

- ☐ Wood
☒ Brick
☐ Stone
☐ Plaster
☐ Other: _____

ROOF:

- ☒ Composition
☐ Wood Shingle
☐ Metal
☐ Tile
☐ Other: _____

PRIMARY USE:

- ☒ Residence
☐ Public Building
☐ Commercial
☐ Industrial
☐ Other: _____

INACCESSIBLE / OBSTRUCTED AREAS:

- ☒ behind siding/walls
☒ ceilings/floor coverings
☒ attic/plumbing/cabinets
☐ _____

PROPOSED TREATMENT TYPE & SPECIFICATIONS:Subterranean Termite Post-Construction Treatment Types: ☒ Partial ☐ Spot ☒ Baiting System ☐ Barrier ☐ Pier and Beam ☒ Slab Construction (See definitions on back side)Drywood Termite, Powder Post Beetle, Wood Boring Beetle or other related Wood Destroying Insect Treatment Type: ☒ Full ☐ Spot (See definitions on back side)Approximate measurements of structure(s) to be treated: 190 Linear feetA label of Trelona Stations and Taurus Sc is attached. The concentration of termiticide or type of treatment to be applied at this location will be 5/6 %.If a baiting system will be installed the minimum number of bait stations will be 8. If a physical barrier will be used, the amount of barrier will be: 190' (circle one) sq ft cu ft

Use Trelona stations and chemical barrier around home.

WARRANTY & ATTACHMENTS:

Warranty information (if any) including area covered, time period of warranty, renewal options and cost, the obligations of the contracting parties, and conditions that could develop which would void the warranty is attached. If the warranty does not include the entire structure treated, the areas included in the warranty are: (specify): See Contract

A copy of the consumer information sheet has been made available to the appropriate party.

Patrick NicholsSignature of Certified Applicator
or Technician Completing Estimate

Patrick Wayne Nichols

Printed Name & License #

03/09/20:

Date

"Signature Captured On Service Agreement"

Signature of Customer Verifying Receipt of This Document

03/09/20:

Date

DEFINITIONS RELATING TO SUBTERRANEAN TERMITE POST-CONSTRUCTION TREATMENTS

A termite treatment may be a partial treatment or spot treatment using termiticide, approved physical barriers, or a baiting system. These types of treatments are defined as follows:

Partial Treatments. This technique allows a wide variety of treatment strategies but is more involved than a spot treatment (see definition below). Ex.: treatment of some or all of the perimeter, bath traps, expansion joints, stress cracks, portions of framing, walls and bait locations.

Spot Treatments. Any treatment which concerns a limited, defined area less than ten (10) linear or square feet that is intended to protect a specific location or "spot". Often there are adjacent areas that are susceptible to termite infestation which are not treated.

Baiting Systems. This type of treatment may include interior and/or perimeter placement of monitoring or baiting systems along with routine inspection intervals. The baiting technique may include one (1) or more locations as prescribed by the product label and instructions.

Barriers. If a physical barrier is used, the square footage of the physical barrier must be recorded and a diagram describing the installation will be provided.

The types of treatment defined may apply to construction types as follows:

Pier and Beam. Treatment of the outer perimeter including porches, patios and treatment of the attached garage. In the crawl space, treatment would include any soil to structure contacts (piers and/or pipes).

Slab Construction. Treatment of the perimeter and all known slab penetrations as well as any known expansion joints or stress cracks.

DEFINITIONS RELATING TO DRYWOOD TERMITE, POWDER POST BEETLE, WOOD BORING BEETLE AND OTHER WOOD DESTROYING INSECT TREATMENTS

A drywood termite, powder post beetle, wood boring beetle, or other related wood destroying insect treatment may be a full treatment or a spot treatment. These types of treatments are defined as follows:

Full Treatment. A treatment to control 100% of the insect infestation by tarpaulin fumigation or appropriate sealing method. A full treatment by fumigation is designed to eliminate every insect colony. It should include the infested structure and all attached structures; or

Spot Treatment. Any treatment less than a full treatment by tarpaulin fumigation. This treatment should be considered only when a drywood termite, powder post beetle, wood boring beetle or related insect infestation has a limited and defined area of infestation. Adjacent areas susceptible to drywood termite, powder post beetle, wood boring beetle, or related insect infestations are not treated. Because of the nature of wood destroying insects, these untreated areas may continue to harbor drywood termites, powder post beetle, wood boring beetle, and related insects throughout the structure without detection.

SPECIMEN

Trelona® ATBS

Annual Bait Stations

- For use by individuals/firms licensed or registered by the state to apply termiticide products. States may have more restrictive requirements regarding qualifications of persons using this product. Consult the structural pest control regulatory agency of your state prior to use of this product with questions you may have.
- A termite bait that may be used in an integrated management program for the protection of structures against subterranean termites.

ACTIVE INGREDIENT:

Novaluron: 1-[3-chloro-4-(1,1,2-trifluoro-2-trifluoro-methoxyethoxy)
phenyl]-3-(2,6-difluorobenzoyl) urea 0.50%

OTHER INGREDIENTS: 99.50%

TOTAL: 100.00%

Contains 0.5 grams of novaluron per 100 grams of formulation
U.S. Patent No. 8,720,108

EPA Reg. No. 499-557

EPA Est. No.

KEEP OUT OF REACH OF CHILDREN CAUTION/PRECAUCION

Si usted no entiende la etiqueta, busque a alguien para que se la explique a usted en detalle.
(If you do not understand the label, find someone to explain it to you in detail.)

Refer to full label for **First Aid, Precautionary Statements,**
Directions For Use, Conditions of Sale and Warranty, and state-specific use site restrictions.

In case of an emergency endangering life or property involving this product,
call day or night 1-800-832-HELP (4357).

NET WEIGHT:

BASF Corporation
26 Davis Drive
Research Triangle Park, NC 27709

 **BASF**
We create chemistry

FIRST AID	
If in eyes	• Hold eyes open and rinse slowly and gently with water for 15 to 20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. • Call a poison control center or doctor for treatment advice.
HOTLINE NUMBER	
Have the product container or label with you when calling a poison control center or doctor or going for treatment. For non-emergency general information on this pesticide product (including health concerns or pesticide incidents), you may call 1-800-832-HELP (4357), 24 hours per day, 7 days per week.	

Precautionary Statements

Hazards to Humans and Domestic Animals

CAUTION. Causes moderate eye irritation. Avoid contact with eyes or clothing. Wash hands thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet.

Environmental Hazards

The active ingredient in this product is extremely toxic to aquatic invertebrates. **DO NOT** place in any area where, because of the movement of water, it could be washed into a body of water containing aquatic life, such as ponds or streams.

Directions For Use

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

Read the **Use Directions** carefully before using this product. This product is part of a termite baiting system and is intended for use in BASF approved bait stations which may be purchased from most professional pest control product distributors. Use of this bait in any other type of station or system not approved by BASF is prohibited. Call 1-800-777-8570 for assistance in using this product or any other components of the termite baiting system.

When inspected and replenished per label **Use Directions**, this product provides on-going structural protection through colony elimination; however, conditions or circumstances beyond the control of the user (competing insects, flooding events, cold weather, presence of alternative food sources, etc.) may alter the time needed to achieve structural protection.

STORAGE AND DISPOSAL

DO NOT contaminate water, food or feed by storage or disposal.

Pesticide Storage

Store in a cool, dry (preferably locked) area, in a place that is inaccessible to children and animals.

Pesticide Disposal

Product not disposed of by use according to label directions should be wrapped in paper and placed in a trash can. If these wastes cannot be disposed of according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

Container Handling

Nonrefillable container. DO NOT reuse or refill this container. Offer for recycling if available. If recycling is not available, place container in trash.

In Case of Emergency

In case of large-scale spill of this product, call:

- CHEMTREC 1-800-424-9300
- BASF Corporation 1-800-832-HELP (4357)

In case of medical emergency regarding this product, call:

- Your local doctor for immediate treatment
- Your local poison control center (hospital)
- BASF Corporation 1-800-832-HELP (4357)

Station Installation

Install stations around a structure such that, except where sufficient access to the ground is not available, the maximum interval between any two stations does not exceed 20 feet. If the distance between 2 points of accessible ground around the structure exceeds 30 feet, it may be advisable to form 1 or more openings in the inaccessible surface to facilitate baiting between the accessible areas.

To install a station, excavate a hole in the ground approximately the same size and dimensions as those of the station. Insert the station and maximize contact between the exterior of the station and the soil. This will increase the probability of termite entrance into the station. If the station is inserted into an opening created through a hardened construction surface (such as concrete, asphalt, etc.), insert station below the surface (in contact with the ground) and seal securely.

Install stations within approximately 5 feet of points of known, probable, or suspected termite foraging activity and in other areas that provide conditions conducive to termite activity. Such areas may include concentrations of cellulose-containing debris in contact with the ground, such as mulch, wood scraps, areas of moderate soil moisture, shaded areas, areas containing plant root systems, bath traps, visible termite foraging tubes, or other evidence of termite activity or conducive conditions. Relocate or modify the station location to prevent water from collecting in the station by, for example, creating a sump area under the installed station or at the bottom of the cavity. If termites have permanently abandoned the station due to excessive moisture, remove the saturated bait and re-bait the station with fresh bait at that time or after the excess moisture condition has abated.

If the structure has an accessible crawl space, stations can be installed in the crawl space in lieu of or in addition to installing stations around the structure; however, either the interior or the exterior of the crawl space must contain a complete set of stations, as defined by this label. Stations can be installed within a slab structure in existing or created openings in the slab surface through which ground is accessible and into which the station can be installed in a secure manner.

Once termite activity has occurred at a station and bait consumption has begun, it may be advisable, depending on the rate of bait consumption in that station and nearby stations, to install 1 or more supplemental stations in the immediate vicinity (up to 5 feet) of the infested station(s) in order that bait consumption by the colony be maximized.

Use Directions

Pre-construction Use

In Florida, for use as a stand-alone preventative treatment for new construction, use two 124 gram cartridges in every bait station around structure.

This product can be used for preventative treatment (before signs of infestation) of new structures (as a substitute for, and in lieu of, pre-construction soil treatment). Place stations around the outside of the structure only after the final exterior grade is established (and preferably after landscaping is completed).

Post-construction Use

This product can be used for remedial treatment of infested existing structures or for preventative treatment (before signs of infestation) of existing structures.

Pre-baiting

Pre-baiting is a process by which termite activity is established at a location prior to the application of bait at that location. Use BASF approved pre-bait to establish activity in the station. Inspect pre-baited stations every 120 days. Inspections cannot take place more than 30 days beyond the required interval unless cold temperatures persist (average daily mean exterior air temperature below 50°F). Termite feeding activity is typically reduced under low temperature conditions making it difficult to accurately assess termite activity. The operator should always make allowances for local circumstances when considering increasing elapsed time between inspections. If there is termite activity in a pre-baited station, make bait continuously available for colony consumption by removing the pre-bait and placing this product in the station. Refer to **Table 1. Baiting Inspection Intervals** for details.

Direct Baiting

This product can be placed in stations at any time prior to termite activity (direct baiting), with or without the presence of termites. Refer to **Table 1. Baiting Inspection Intervals** for details.

Table 1. Baiting Inspection Intervals

Inspection Interval	Cartridges Required
120 Days*	One 124 gram cartridge
Annual	Every bait station must contain: Two 124 gram cartridges

Inspection intervals must comply with state regulations where applicable.

Shorter inspection intervals may be warranted if termite activity indicates complete consumption of the bait in a station before the scheduled inspection.

Inspections cannot take place more than 30 days beyond the required interval unless cold temperatures persist (average daily mean exterior air temperature below 50°F). Termite feeding activity is typically reduced under low temperature conditions making it difficult to accurately assess termite activity. The operator should always make allowances for local circumstances when considering increasing elapsed time between inspections.

- **DO NOT** allow more than 6 months to pass between inspections for the 120 day inspection interval.
- **DO NOT** allow more than 15 months to pass between inspections for the annual inspection interval.

* After feeding has stopped, and there has been no activity for one year, inspect the stations every 6 months.

Inspecting Stations and Replacing Bait

To inspect a station, remove the cover and visually examine the cartridges for the presence of termites, being careful to minimize disturbance in the case that termites are present. If it appears that >1/3 of a bait cartridge in the station has been consumed, replace that cartridge with a new cartridge. If termites are not present, inspect bait for excessive decay. Replace excessively decayed bait and securely close the station cover.

Transitioning from 120 Day to Annual Inspection Interval in Baited Stations

Alternatively, baited stations on a 120 day inspection interval may be switched to an annual inspection interval if all contents are removed from the stations and replaced with two **Trelona® Compressed Termite Bait** cartridges. All stations around the structure must contain two **Trelona Compressed Termite Bait** cartridges or the inspection period cannot exceed 120 days. Inspection of bait treatments made with this product must be done according to the inspection intervals listed in **Table 1. Baiting Inspection Intervals**.

Non-structure Spot Treatment

This product can also be applied or used as a spot treatment in areas not associated with structures or buildings, such as around trees, wood piles, landscaping elements, railroad track beds, at the edge of property lines and other areas where termite activity is known or suspected. Such treatments may be made alone or in combination with an additional method of termiticide treatment. To provide a non-structure spot treatment, install one or more bait station(s) in the soil at or near points of known or suspected termite activity. Non-structure spot treatment baiting may be discontinued at any time at the discretion of the applicator. Inspection of bait treatments made with this product must be done according to the inspection intervals listed in **Table 1. Baiting Inspection Intervals**.

Supplemental Treatments

If a soil-applied liquid or granular termiticide treatment is performed in conjunction with installation of the bait system, **DO NOT** treat the area where stations are installed (preferably not within 2 feet of stations). Because the use of bait may be a multi-step process, localized treatment using soil applied termiticide to the structure infested with active termites at the time of baiting may provide more immediate control of termites in those parts of the structure. Preventative spot treatments to critical areas of soil or wood may be performed in conjunction with station installation. **DO NOT** treat directly on top of installed stations with a repellent insecticide during routine general pest or perimeter applications.

This product can be applied or used as a supplemental treatment in, underneath, and around structures or buildings to kill termites in support of or as a supplement to a termiticide product labeled for and applied as a stand-alone termiticide treatment. This includes pre- and post-construction soil termiticide treatments labeled for providing structural protection. This product may also be used in combination with an additional termiticide treatment as a supplemental treatment in areas not associated with structures or buildings, such as around trees, wood piles, landscaping elements, railroad track beds, and other areas where termite activity is known or suspected. Inspection of bait treatments made with this product must be done according to the inspection intervals listed in **Table 1. Baiting Inspection Intervals**.

Conditions of Sale and Warranty

The **Directions For Use** of this product reflect the opinion of experts based on field use and tests. The directions are believed to be reliable and must be followed carefully. However, it is impossible to eliminate all risks inherently associated with the use of this product. Ineffectiveness or other unintended consequences may result because of such factors as environmental conditions, presence of other materials, or use of the product in a manner inconsistent with its labeling, all of which are beyond the control of BASF CORPORATION ("BASF") or the Seller. To the extent consistent with applicable law, all such risks shall be assumed by the Buyer. BASF warrants that this product conforms to the chemical description on the label and is reasonably fit for the purposes referred to in the **Directions For Use**, subject to the inherent risks, referred to above. **TO THE EXTENT CONSISTENT WITH APPLICABLE LAW: (A) BASF MAKES NO OTHER WARRANTIES EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF FITNESS FOR PARTICULAR PURPOSE OR MERCHANTABILITY, (B) BUYER'S EXCLUSIVE REMEDY AND BASF'S AND SELLER'S EXCLUSIVE LIABILITY, WHETHER IN CONTRACT, TORT, NEGLIGENCE, STRICT LIABILITY, OR OTHERWISE, SHALL BE LIMITED TO REPAYMENT OF THE PURCHASE PRICE OF THE PRODUCT, AND (C) BASF AND THE SELLER DISCLAIM ANY LIABILITY FOR CONSEQUENTIAL, INCIDENTAL, SPECIAL OR INDIRECT DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT.** BASF and the Seller offer this product, and the Buyer and User accept it, subject to these **Conditions of Sale and Warranty** which may be varied only by agreement in writing signed by a duly authorized representative of BASF.

PCS915

Trelona is a registered trademark of BASF.

© 2020 BASF Corporation
All rights reserved.

000499-00557.20200130.**NVA 2020-04-466-0013**

Based on: NVA 2019-04-466-0079

Supersedes: NVA 2017-04-466-0141

BASF Corporation
26 Davis Drive
Research Triangle Park, NC 27709



We create chemistry

Taurus SC

Termiticide / Insecticide

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

- **For sale to, use and storage only by individuals/firms licensed or registered by the state to apply termiticide and/or general pest control products.**
- **DO NOT** use this product for termite or other pest control indoors, except for label-specified applications for termite control and foam applications to wall voids for control of other listed pests.
- **DO NOT** use on golf course turf. May be used for control of termites and other listed pests found on/near structures associated with golf courses, but only as specified on this label.
- **DO NOT** use on animal trophies or animal skins.

See inside booklet for additional **Restrictions, First Aid, Precautionary Statements, Directions For Use, Conditions of Sale and Warranty**, and state-specific use sites and/or restrictions.

For sale to, use and storage only by individuals/firms licensed or registered by the state to apply termiticide and/or general pest control products.

Active Ingredient

*Fipronil	9.1%
Other Ingredients	90.9%
	100.0%

*(5-amino-1-(2,6-dichloro-4-(trifluoromethyl)phenyl)-4-((1,R,S)-(trifluoromethyl)sulfinyl)-1-H-pyrazole-3-carbonitrile)

Taurus SC termiticide / insecticide contains 0.8 pounds active ingredient per gallon.

KEEP OUT OF REACH OF CHILDREN

Caution/Precaución

Si usted no entiende la etiqueta, busque a alguien para que se la explique a usted en detalle. (If you do not understand the label, find someone to explain it to you in detail.)

(See attached label for additional precautionary information and complete Directions for Use).

EPA Reg. No. 53883-279

EPA Est. No. 53883-TX-002

Control Solutions, Inc.
5903 Genoa-Red Bluff
Pasadena, TX 77507-1041

Net Contents:

FIRST AID

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

If swallowed:	• Call a Poison Control Center or doctor immediately for treatment advice. • Have person sip a glass of water if able to swallow. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person.
If on skin or clothing:	• Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
If inhaled:	• Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. • Call a poison control center or doctor for treatment advice.
If in eyes:	• Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. • Call a poison control center or doctor for treatment advice.
Note to Physician: There is no specific antidote. All treatment should be based on observed signs and symptoms of distress in the patient. Overexposure to materials other than this product may have occurred. In severe cases of overexposure by oral ingestion, lethargy, muscle tremors, and in extreme cases, possibly convulsions may occur.	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact SafetyCall® (866) 897-8050 for emergency medical treatment information	

PRECAUTIONARY STATEMENTS

Hazards to Humans and Domestic Animals

Caution

Harmful if swallowed, absorbed through skin or inhaled. Do not get in eyes, on skin or on clothing. Do not breathe spray mist. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco. Remove and wash contaminated clothing before reuse.

Personal Protective Equipment (PPE):

All pesticide handlers (mixers, loaders, and applicators) must wear long-sleeved shirt and long pants, socks, shoes, and chemical-resistant gloves. All pesticide handlers must wear a dust/mist filtering respirator (MSHA/NIOSH approval number prefix TC-21C), or a NIOSH approved respirator with any N, R, P or HE filter, when working in a non-ventilated space, including but not limited to crawl-spaces and basements. All pesticide handlers must wear protective eyewear (goggles, a faceshield, or safety glasses with front, brow, and temple protection) when working in a non-ventilated space, including but not limited to crawl-spaces and basements or when applying termiticide by rodding or sub-slab injection.

User Safety Recommendations

Users should wash hands thoroughly with soap and water before eating, drinking, chewing gum, using tobacco or using the toilet.

Remove contaminated clothing. Then wash body thoroughly with soap and water and put on clean clothing. Wash clothing with detergent and hot water before reusing.

Remove PPE immediately after handling this product. Wash outside of gloves before removing. Wash PPE before reusing.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to birds, fish, and aquatic invertebrates. Do not apply directly to water, or to areas where surface water is present or to intertidal areas below the mean high water mark. Runoff from treated areas may be hazardous to aquatic organisms in neighboring areas. Care must be taken to avoid runoff. Do not contaminate water by cleaning equipment or disposal of wastes. Do not contaminate water when disposing of equipment washwaters.

DIRECTIONS FOR USE

It is violation of federal law to use this product in a manner inconsistent with its labeling.

Read entire label before using this product.

For sale to, use and storage only by individuals/firms licensed or registered by state to apply termiticide and/or general pest control products. States may have more restrictive requirements regarding qualifications of persons using this product. Consult the structural pest control regulatory agency of your state prior to use of this product.

DIRECTIONS FOR USE TO CONTROL TERMITES

USE RESTRICTIONS:

When treating adjacent to an existing structure, the applicator must check the area to be treated, and immediate adjacent areas of the structure, for visible and accessible cracks and holes to prevent any leaks or significant exposures to persons occupying the structure. People present or residing in the structure during application must be advised to remove their pets and themselves from the structure if they see any signs of leakage. After application, the applicator is required to check for leaks. All leaks resulting in the deposition of termiticide in locations other than those prescribed on this label must be cleaned up prior to leaving the application site. Do not allow people or pets to contact contaminated areas or to reoccupy contaminated areas of the structure until the clean up is completed.

- Prior to drilling and treating through concrete structures, such as patios, porches, sidewalks and foundation slabs applicator should first determine that there are no habitable areas below that could be unintentionally contaminated by the treatment.
- Only protected applicators wearing personal protective equipment as required by this product label may be in the area during application.
- All holes in commonly occupied areas into which this termiticide / insecticide product has been applied must be plugged. Plugs must be of a non-cellulose material or covered by an impervious, non-cellulose material.
- Do not apply finished dilution of this product until all heating/air conditioning ducts, air vents, plumbing pipes, sewer lines, floor drains, heating pipes and electrical lines/conduits are known and identified. Do not puncture or contaminate any of these.

- Do not treat within a distance of one foot out from the drip line of edible plants.
- Do not contaminate public and private water supplies.
- Do not make treatments while precipitation is occurring.
- Do not treat soil that is water-saturated or frozen.
- Use anti-backflow or air gap equipment with filling hoses.

General Information

When used in accordance with the directions in this label, this product provides effective prevention and/or control of subterranean termites. This product must be applied in manner which provides a continuous treated zone to effectively prevent termites from infesting wood.

This product may only be applied by licensed technicians familiar with trenching, rodding, short rodding, sub-slab injection, low-pressure banded surface applications and foam delivery techniques. This product is a highly effective termiticide against a variety of subterranean termites including species of *Reticulitermes*, *Zootermopsis*, *Heterotermes*, and *Coptotermes*.

Taurus SC is formulated as a water-based suspension concentrate liquid containing 9.1% active ingredient.

Mixing Instructions

To mix Taurus SC termiticide / insecticide:

1. Fill the tank 1/4 to 1/3 full with water. The filling hose must be equipped with an anti-backflow device or water flow must include an air gap to protect against back siphoning.
 2. Start the pump to begin by-pass agitation and place the end of the treating tool in the tank to allow circulation through the hose.
 3. Add the appropriate amount of Taurus SC required to prepare the desired dilution.
 4. Add the remaining water.
 5. Continue to run the pump allowing recirculation through the hose back into the tank until the Taurus SC is completely dispersed.
- To mix a 0.06% dilution, add 0.8 fluid ounces of Taurus SC per gallon of finished dilution.
 - To mix a 0.09% dilution, add 1.2 fluid ounces of Taurus SC per gallon of finished dilution.
 - To mix a 0.125% dilution, add 1.6 fluid ounces of Taurus SC per gallon of finished dilution.

Application Rates for Termiticide Use

For most applications, use the 0.06% dilution and apply at a rate of 4 gallons of dilution per 10 linear feet per foot of depth. For example, for treatment of 10 linear feet with a four-foot depth, use 4 x 4 (16) gallons per 10 linear feet. Do not apply at a concentration less than 0.06%.

Where severe termite infestations occur, where problem soils occur or where difficult or problem construction types are encountered, it may be advisable to use either 0.09% or 0.125% concentration. Apply the higher concentration at a rate of 4 gallons of solution per 10 linear feet per foot of depth. For example, for treatment of 10 linear feet with a four-foot depth, use 16 (4 x 4) gallons per 10 linear feet.

In dense soil that will not accept a volume of 4 gallons per linear foot per foot of depth, use the 0.125% dilution, and apply at a rate of 2 gallons per 10 linear feet per foot of depth. For example, for treatment of 10 linear feet with a four-foot depth, use 8 (2 x 4) gallons per 10 linear feet. When using the lower volume of application, be careful to maintain a continuous treated zone. If application requires drilling, drill holes less than 12" apart to maintain a continuous treated zone.

PRE-CONSTRUCTION TREATMENT

In advance of treatment, applicators must notify the general contractor, construction superintendent, or other responsible personnel of the intended Taurus SC application and the intended sites of application. Applicators must instruct the person responsible to notify construction workers and other individuals on site to vacate the treatment area and not to return until Taurus SC has been absorbed into the soil. Do not apply at a dosage and/or concentration lower than 0.06% for applications up to and including installation of the final grade.

General Information

Pre-construction treatments include any treatment made during all phases of construction up to and including installation of the final grade. Establishing a thorough and complete horizontal and vertical treated zone will provide effective pre-construction termite control.

When foundations are deeper than 4 feet, it is preferable to apply Taurus SC as the backfill is being replaced. If the backfill is already in place, the applicator must trench and rod into the trench or trench along the foundation walls, around pillars and other foundation elements, at the rate prescribed from grade to a minimum depth of 4 feet. When trenching in sloping or tiered soil, the trench must be stepped to ensure adequate distribution and to prevent Taurus SC from running out of the trench. When the top of the footing is exposed, the soil adjacent to the footing must be treated to a depth not to exceed the bottom of the footing. Never treat any structure below the footing.

Concrete Slab (Including Monolithic, Floating and Supported Concrete Slabs) on Ground or in Basements and Crawl Spaces

Horizontal treated zones: Apply an overall treatment of Taurus SC to the entire surface to be covered by the concrete slab. This includes living area, as well as carports, porches, basement floors, and any extended entrances. Apply this treatment at the rate of 1 to 1.5 gallons of finished dilution per 10 square feet using a coarse spray nozzle and low-pressure spray (less than 25 p.s.i.). Spray the dilution evenly and uniformly over the entire area to be treated. If the slab is not to be poured the same day as treatment, cover the treated soil with a waterproof barrier such as polyethylene sheeting.

Vertical treated zones: Apply Taurus SC at a rate of 1 gallon of finished dilution per square foot around anything penetrating the slab such as utility service and plumbing lines. Apply Taurus SC at a rate of 4 gallons of finished dilution per 10 linear feet per foot of depth along the inside and outside perimeter of foundation walls. The applicator must trench and rod into the trench or trench along the foundation walls and around pillars and other foundation elements. If the footing is more than 4 feet below grade, make this treatment to a minimum of 4 feet below grade. A trench need not be any wider than 6 inches. Treat the soil which will be replaced into the trench using a low-pressure spray (not more than 25 p.s.i. at the nozzle). When rodding from grade or from the bottom of a shallow trench, space the rod holes no more than 12 inches apart in a manner which will create a continuous treated zone.

It is highly recommended that a complete horizontal treated zone be created prior to the slab pour. However, if the slab was poured before a horizontal treatment could be made, refer to the "Post-Construction" section of this label for alternate application instructions.

Hollow Block Foundations or Voids

Create a continuous treatment zone by treating hollow block foundations or voids in masonry resting atop the footing. If voids in the masonry elements are not openly accessible, drill and treat into these voids by applying 2 gallons of finished dilution per 10 linear feet of footing using a nozzle pressure of 25 p.s.i. or lower. When using this treatment, drill the access holes as close to the footing as is practical. Drilling below the sill plate is acceptable. Applicators must examine the treated areas of voids in block or rubble foundation walls closely for possible runoff as a precaution against application leakage. Mechanical alteration to some areas may be required before a treatment can be made. Other areas may not be treatable.

All leaks resulting during the application of Taurus SC in locations other than those prescribed on this label must be cleaned up before leaving the application site. Do not allow people or pets to come in contact with contaminated areas or allow them to reoccupy the treatment site until the clean up is completed.

Not for use in voids insulated with rigid foam.

Use with Other Products

When a borate-based termite control product has been chosen as the primary pre-construction treatment for subterranean termites and is applied in accordance with the directions for use on the borate product's label, Taurus SC may be used as an exterior perimeter pre-construction treatment. For an exterior perimeter pre-construction treatment, Taurus SC must be applied in such a way as to create a continuous treated zone along the exterior foundation of the structure. A complete and thorough horizontal pre-construction treatment with Taurus SC under the concrete slab is optional.

Taurus SC may also be applied to critical areas of the interior of the structure including around plumbing or utility services penetrating floors, bath and / or shower traps, or along concrete expansion joints, and other areas of known or suspected termite activity.

Refer to the "POST-CONSTRUCTION EXTERIOR PERIMETER / LOCALIZED INTERIOR (EP / LI) STRUCTURAL TERMITE TREATMENT" section of this label for instructions on applications to the exterior perimeter of a structure and to critical areas in the interior of the structure.

POST-CONSTRUCTION CONVENTIONAL STRUCTURAL TERMITE TREATMENT

General Information

For applications of Taurus SC made after the final grade is installed to protect the structure from termite infestation and/or to control existing termite populations, the applicator must trench and rod into the trench or trench along the foundation walls, around pillars and other foundation elements, at the rate prescribed from grade to the top of the footing. When the footing is more than 4 feet below grade, treat to a minimum depth of four feet. The depth of treatment will vary depending on soil type, degree of compaction and location of termite activity. When the top of the footing is exposed, the soil adjacent to the footing must be treated to a depth not to exceed the bottom of the footing. Never treat any structure below the footing.

To establish a complete exterior perimeter treatment zone along the foundation wall, drill any exterior concrete structures adjoining the foundation, such as patios, porches and sidewalks, and treat by sub-slab injection of Taurus SC finished dilution.

Before treatment, locate and identify all heating or air conditioning vents and ducts, water and sewer plumbing lines, electrical lines and conduits, and avoid contamination or damage to these structural elements.

Concrete Slab Over Soil (Including Monolithic, Floating and Supported Slabs)

Exterior perimeter: Apply by trenching and rodding into the trench or by trenching along the foundation walls at the rate of 4 gallons of finished dilution per 10 linear feet per foot of depth, or, if the footing is more than 4 feet below grade treat to a minimum depth of 4 feet. Trenches need not be wider than 6 inches and must be a minimum of 6 inches deep or to the bottom of the footing. Never treat a structure below the footing. Space the rod holes no more than 12 inches apart in a manner which will create a continuous treated zone. Mix the finished dilution into the soil before replacing it into the trench.

Sub-slab injection: Sub-slab injection treatments can be made from inside the structure, or in cases where this is not possible, from the outside of the structure by drilling through the foundation as directed below. Before treatment, locate and identify all heating or air conditioning vents and ducts, water and sewer plumbing lines, electrical lines and conduits, and avoid contamination or damage to these structural elements.

Vertical drilling / injection: Make treatments under the slab by drilling vertically through the slab along the interior perimeter of the foundation including the garage. Drill holes along all concrete expansion joints, cracks, plumbing and utility services penetrating the slab. Drill holes along interior partition walls when there is clear evidence of termite activity or damage. Space all drill-holes no more than 12 inches apart in a manner which will create a continuous treated zone. Inject the finished dilution of Taurus SC into the drill-holes at a rate of 4 gallons per 10 linear feet per foot of depth. When making applications, use a lateral dispersal nozzle to achieve the best results. After treatment, all holes in commonly occupied areas must be plugged with a non-cellulose material or covered with an impervious, non-cellulose material.

Horizontal drilling / rodding / sub-slab injection from the exterior of the foundation: Use this technique to treat underneath the slab only when floors or interior design do not allow for treatment by vertical drilling. Care must be taken not to rod into heating or air conditioning vents and ducts, water and sewer plumbing lines, electrical lines and conduits. Use horizontal short rodding practices to create a continuous treated zone into the soil proximal to the inside of the foundation wall. Angle drill-holes through the outside of the foundation to ensure deposition of Taurus SC below any existing heating ducts, water and sewer lines, or electrical conduits. Use horizontal long rodding practices only when the areas to be treated underneath the slab are not accessible by vertical rodding or horizontal short rodding. Do not use long rods exceeding 20 feet. For all horizontal rodding applications space drill-holes no more than 12 inches apart in a manner which will create a continuous treated zone. Inject the finished dilution of Taurus SC into the drill-holes at a rate of 4 gallons per 10 linear feet per foot of depth. All holes must be plugged with a non-cellulose material or covered by and impervious, non-cellulose material.

Bath traps: Treat exposed soil or soil covered with tar or similar sealants beneath or around plumbing and/or drain pipe entry areas with a minimum of 1 gallon but not more than 4 gallons of finished dilution

per square foot. It may be necessary to remove tar or sealant to ensure adequate soil penetration. Install an access door or inspection portal if one is not already present. After inspection and removal of all wood or cellulose debris, treat the soil by rodding or drenching with the finished dilution of Taurus SC.

Shower drains: To treat the soil beneath and adjacent to shower pan drains, drill through the slab adjacent to the shower pan and apply the finished dilution of Taurus SC by sub-slab injection. Foam can be used to maximize dispersion. Drill multiple access points adjacent to the drain, and use a directional dispersion tip to enhance the treatment of the soil beneath the drain. Treat with a minimum of 1 gallon but not more than 4 gallons of finished dilution per shower drain. Horizontal rodding can be used to access and treat soil associated with the shower drain.

Structures with French Drains and Sump Pumps

In sites where French drains exist at the footer along the foundation perimeter, common in hollow block foundation structures, the soil must be dry before applications can be made. Do not treat soil that is saturated or frozen. Do not make treatments while precipitation is occurring. To prevent seepage of finished dilution or damage to drains or tiles, do not rod through the slab any closer than 24 inches from French drains. Do not apply Taurus SC within 5 feet from the sump pump pit and pump. Do not drill through hollow block foundations that border French drains to prevent drainage or seepage from the block into the drains.

Identify and locate French drains, then apply Taurus SC in the following manner:

- 1) Unplug the sump pump. Inspect the sump pit for water. If no water is present, keep the sump pump unplugged while making the treatment.
- 2) If water is in the pump pit, unplug the sump pump and remove four cups of water from the pit. Mark the water level. Wait 10 minutes then check the water level in the pit. If the water level has risen, there is too much seepage to make a treatment. If the water level has not risen, a treatment can be made as long as the sump pump remains unplugged.

During application, check the sump pump pit every few minutes for the presence of termiticide dilution. If dilution is detected, stop the treatment immediately and remove all dilution from the pump pit before plugging the pump back in. Dispose of the dilution from the sump pump pit as directed by this label in the "Storage and Disposal" section.

Basement Structures

Exterior perimeter: Apply by trenching and rodding into the trench or by trenching along the foundation walls at the rate of 4 gallons of finished dilution of Taurus SC per 10 linear feet per foot of depth, or, if the footing is more than 4 feet below grade treat to a minimum depth of 4 feet. Trenches need not be wider than 6 inches and must be a minimum of 6 inches deep or to the bottom of the footing. When trenching in sloping or tiered soil, the trench must be stepped to ensure adequate distribution and to prevent Taurus SC from running out of the trench. Never treat a structure below the footing. Space the rod holes no more than 12 inches apart in a manner which will create a continuous treated zone. Mix the finished dilution into the soil before replacing it into the trench.

Inside perimeter: To treat under the basement floor slab, drill vertically through the slab along the interior perimeter of the foundation. Drill holes along all concrete expansion joints, cracks, and any plumbing or utility services penetrating the slab. Drill holes along both sides of partition foundation walls, and around piers. Where there is clear evidence of termite activity in a non-foundation interior partition wall, drill holes through the slab adjacent to the wall along one side. Space all drill-holes no more than 12 inches apart in a manner which will create a continuous treated zone. Inject the finished dilution of Taurus SC into the drill-holes at the rate of 4 gallons per 10 linear feet per foot of depth. When making applications, use a lateral dispersal nozzle to achieve the best results. After treatment, all holes in commonly occupied areas must be plugged with a non-cellulose material or covered with an impervious, non-cellulose material.

Accessible Crawl Space Construction

Before treatment turn off any air circulation equipment that moves air from the area to be treated to any untreated interior space of the structure. Do not turn the air circulation system back on until the application of Taurus SC is completed and has been absorbed into the soil.

Treat crawl spaces by applying a vertical Taurus SC termiticide treatment at the rate of 4 gallons of finished dilution per 10 linear feet per foot of depth from grade to the top of the footing, or, if the footing is more than 4 feet below grade treat to a minimum depth of 4 feet. Apply by trenching, or by trenching and rodding into the trench. Treat both sides of foundation and around all piers and pipes. In areas where physical obstructions exist that prevent trenching, such as concrete walkways adjacent to the foundation,

apply by rodding alone. Where soil type and/or conditions make trenching impossible, apply by rodding. When the top of the footing is exposed, treat the soil adjacent to the footing to a depth not to exceed the bottom of the footing. Read and follow the mixing directions in the "Mixing Instructions" section of this label when encountering soil types which will not accept the full application volume.

- Rod holes and trenches must not extend beneath the bottom of the footing.
- Space the rod holes no more than 12 inches apart in a manner which will create a continuous treated zone.
- Trenches need not be wider than 6 inches and must be a minimum of 6 inches deep or to the bottom of the footing. When trenching in sloping or tiered soil, the trench must be stepped to ensure adequate distribution and to prevent Taurus SC from running out of the trench. Mix the finished dilution into the soil before replacing it into the trench.

Inaccessible Crawl Space Construction

Before treatment turn off any air circulation equipment that moves air from the area to be treated to any untreated interior space of the structure. Do not turn the air circulation system back on until the application of Taurus SC is completed and has been absorbed into the soil.

For any inaccessible interior areas, for example where the clearance between the floor joists and ground surfaces do not allow for operator access, excavate, if possible, and follow the instructions for accessible crawl spaces. When excavation is not possible, apply one or a combination of the following two methods:

- 1) Establish a horizontal treated zone by applying 1 gallon of finished dilution of Taurus SC with a coarse application nozzle (e.g., Delavan Type RD Raindrop, RD-7 or larger, or Spraying Systems Co. 80110LP Teejet or comparable nozzle) per 10 square feet of soil surface using a nozzle pressure of less than 25 p.s.i. For any area which cannot be reached with the application wand, use one or more extension rods. Do not broadcast or power spray with high pressures.
- 2) Establish a horizontal treated zone by drilling through the foundation wall or through the floor above and treat the soil adjacent to the foundation at a rate of 1 gallon of finished dilution of Taurus SC per 10 square feet. Drill spacing must not exceed 16 inches between drill-holes. Many states have smaller interval requirements so check state regulations before application. Treat the soil adjacent to foundation elements with short or long rodding techniques without drilling if it is possible to reach the soil to be treated with the treatment tool.

Hollow Block Foundations / Voids

Establish a continuous treated zone in hollow block foundations or voids in masonry resting on top of the footing by drilling and treating into voids of multiple masonry elements of the structure to soil level. If not openly accessible, drill and treat into voids of masonry elements. Apply 2 gallons of finished dilution per 10 linear feet of footing at a nozzle pressure of 25 p.s.i. or less. When making this treatment, drill access holes as close as possible to the footing, below the level of the sill plate if necessary. Applicators must examine the treated areas for possible runoff as a precaution against application leakage. Mechanical alteration to some areas may be required before a treatment can be made. Other areas may not be treatable.

All leaks resulting during the application of Taurus SC in locations other than those prescribed on this label must be cleaned up before leaving the application site. Do not allow people or pets to come in contact with contaminated areas until the clean up is completed.

Not for use in voids insulated with rigid foam.

Treatment of Structures with Wells or Cisterns

Do not contaminate wells or cisterns.

Do not apply Taurus SC within 5 feet of any well or cistern. Treat soil 5 to 10 feet from any well or cistern by backfill method only. Treat soil adjacent to water pipes within 3 feet of grade by backfill method only.

Backfill method:

- 1) Trench to remove the soil to be treated and place it into a wheelbarrow or onto heavy plastic sheeting or similar material.
- 2) Treat the soil at a rate of 4 gallons of finished dilution of Taurus SC per 10 linear feet per foot of trench depth, or at a rate of 1 gallon per cubic foot of soil. Mix the Taurus SC thoroughly into soil while taking care to prevent runoff or spillage.
- 3) After the treated soil has completely absorbed the finished dilution of Taurus SC, put it back into the trench.

Structures Adjacent to Wells / Cisterns and / or Other Bodies of Water

Prior to application examine any structure with nearby sources of water such as wells, cisterns, ponds, streams or other bodies of water, then follow the treatment procedures described below.

- 1) If the pipe(s) from the well enter the structure with 3 feet of grade, expose them if possible prior to treatment. Treat the soil adjacent to the water pipe(s) using the backfill method described above.
- 2) Take precautions, prior to treatment, to limit the risk of Taurus SC being applied into subsurface drains which empty into any bodies of water, including evaluating whether treatment of the footer could result in contamination of subsurface drains. Take into consideration such factors as depth to the drain system, soil type and degree of soil compaction when determining the depth of treatment.
- 3) Use the treated backfill method, when appropriate (e.g., on the water side of the structure), to minimize off-site movement of Taurus SC.
- 4) To minimize potential runoff of Taurus SC into non-target areas, apply a finished dilution of 0.125% at a rate of 2 gallons per 10 linear feet per foot of depth.

Plenum Construction

Before treatment turn off any air circulation equipment that moves air from the area to be treated to any untreated interior space of the structure. Do not turn the air circulation system back on until the application of Taurus SC is completed and has been absorbed into the soil.

Treat the soil exterior to the foundation walls according to the instructions in the "Accessible Crawl Space Construction" section of this label.

Follow the instructions below for interior treatment of plenum structures that use a sealed under floor space to circulate heated or cooled air throughout the structure:

- 1) Remove sealing fabric and anything on the sealing fabric to expose no more than an 18 inch width adjacent to all foundation structures, including foundation walls, interior piers, pipes and any other structures in contact with soil. Treat according to the instructions for exterior and interior treatment in the "Accessible Crawl Space Construction" section of this label.
- 2) After the finished dilution of Taurus SC has been absorbed into the soil, return the sealing fabric and anything removed from the surface of the sealing fabric to their original pre-treatment positions.

Foam Application

When construction practices, soil subsidence, or other factors make it difficult to establish a continuous treated zone with conventional liquid application methods, supplement treat with the use of foam-generating equipment. Foam applications are useful in the treatment of filled stoops and porches, chimney bases, into block voids, behind masonry or other veneers, and into stud walls. Utilize applications of dry foam only (a range of 15:1 to 50:1 expansion ratio) when treating voids in stud walls. Apply foam to wall voids where evidence of termite presence or damage exist or are suspected.

Foam only treatments under slabs are appropriate when maximum horizontal coverage is desired. In areas with no deep foundation or footing (for example: around plumbing entries and near settlement cracks in concrete slabs). Use both conventional liquid application and foam treatment in areas where both lateral spread and deeper vertical penetration of Taurus SC are desired. Effective treatment is highly dependent on volume and amount of active ingredient. Apply at least 75% of the finished dilution of Taurus SC as a liquid treatment, then deliver the remaining 25% or less to the appropriate areas as a foam application. The total amount of product applied as a combined foam and liquid treatment should be equivalent to volume of Taurus SC liquid finished dilution required for a liquid application alone. Foam applications provide a good supplement to liquid applications in difficult to treat areas.

Foam mixing instructions:

Prepare the desired finished dilution of Taurus SC, then mix with the manufacturer's recommended quantity of foaming agent in foaming equipment. Apply a sufficient volume of Taurus SC foam to establish a continuous treated zone at the rates recommended in this label for specific applications. When sufficient foam volume cannot be applied to achieve the recommended rate of Taurus SC, supplement the treatment with additional liquid finished dilution to assure appropriate treatment volume and concentration in the treated area.

- 1 gallon of finished dilution at a foam expansion ratio of 25:1 makes 25 gallons of foam.
- 1.66 gallons of finished dilution at a foam expansion ratio of 15:1 makes 25 gallons of foam.
- 2.5 gallons of finished dilution at a foam expansion ratio of 10:1 makes 25 gallons of foam.

- 5 gallons of finished dilution at a foam expansion ratio of 5:1 makes 25 gallons of foam.

POST-CONSTRUCTION EXTERIOR PERIMETER / LOCALIZED INTERIOR (EP / LI) STRUCTURAL TERMITE TREATMENT – Not approved for use in Louisiana
--

General Information

This post-construction application of Taurus SC can be made after the final grade is installed to protect the structure from termite infestation and/or to control existing termite populations. This treatment method is designed to be non-invasive to the interior of the structure with the establishment of a continuous treated zone along the exterior of the foundation and only treating interior spaces where termite activity has been found. If you have questions regarding this treatment, consult the appropriate state agency.

Termite activity is defined as the presence of one or more of the following signs of infestation:

- 1) Alates (winged termites) have swarmed inside the structure.
- 2) Live termites are found to be active within the structure.
- 3) There is clear evidence of termite activity on or inside the structure such as the presence of mud tubes, galleries in wood.

Do not apply Taurus SC finished dilution as perimeter / localized interior treatment at a concentration lower than 0.06% or at an application volume lower than those specified in the "Application Rates for Termiticide Use" section of this label.

EXTERIOR PERIMETER TREATMENT

To prevent termite infestation of a structure, exterior perimeter applications of Taurus SC must be made in a manner which will create a continuous treated zone. If situations are encountered where the soil will not accept the full application volume recommended in the use directions below, read and follow the direction in the "Application Rates for Termiticide Use" section of this label.

Concrete Slab on Ground (Including Monolithic, Floating and Supported Concrete Slabs)

Apply along the exterior foundation perimeter by trenching and rodding into the trench or by trenching at the rate of 4 gallons of finished dilution per 10 linear feet per foot of depth. Trenches need not be wider than 6 inches and must be a minimum of 6 inches deep or to the bottom of the footing. Space the rod holes no more than 12 inches apart in a manner which will create a continuous treated zone. Mix the finished dilution into the soil before replacing it into the trench.

In areas where physical obstructions exist that prevent trenching, such as concrete walkways adjacent to the foundation, apply by rodding alone. Where soil type and/or conditions make trenching impossible, apply by rodding. In order to establish a complete exterior perimeter treatment zone, drilling and sub-slab treatment will be necessary wherever adjoining concrete structures exist such as patios, porches or sidewalks. For driveways, exterior drilling is necessary only around building supports or wall elements permanently located at driveway joints. Never treat a structure below the footing.

Basement and Inaccessible Crawl Space Construction

Apply along the exterior foundation perimeter by trenching and rodding into the trench or by trenching along the foundation walls at the rate of 4 gallons of finished dilution of Taurus SC per 10 linear feet per foot of depth, or, if the footing is more than 4 feet below grade treat to a minimum depth of 4 feet.

Trenches need not be wider than 6 inches and must be a minimum of 6 inches deep or to the bottom of the footing. When trenching in sloping or tiered soil, the trench must be stepped to ensure adequate distribution and to prevent Taurus SC from running out of the trench. Space the rod holes no more than 12 inches apart in a manner which will create a continuous treated zone. Mix the finished dilution into the soil before replacing it into the trench. Never treat a structure below the footing.

In areas where physical obstructions exist that prevent trenching, such as concrete walkways adjacent to the foundation, apply by rodding alone. Where soil type and/or conditions make trenching impossible, apply by rodding. In order to establish a complete exterior perimeter treatment zone, drilling and sub-slab treatment will be necessary wherever adjoining concrete structures exist such as patios, porches or sidewalks. For driveways, exterior drilling is necessary only around building supports or wall elements permanently located at driveway joints. Never treat a structure below the footing.

If termite activity is detected inside an inaccessible crawl space, the area must be treated. Make a localized interior treatment at the site of termite activity and extending at least 2 feet in both directions from the activity. Choose the appropriate application technique for treating inaccessible crawl space construction by referring to the "POST-CONSTRUCTION CONVENTIONAL STRUCTURAL TERMITE TREATMENT" section of this label.

Accessible Crawl Spaces

Before treatment turn off any air circulation equipment that moves air from the area to be treated to any untreated interior space of the structure. Do not turn the air circulation system back on until the application of Taurus SC is completed and has been absorbed into the soil.

Treat crawl spaces by applying a vertical Taurus SC termiticide treatment at the rate of 4 gallons of finished dilution per 10 linear feet per foot of depth from grade to the top of the footing, or, if the footing is more than 4 feet below grade treat to a minimum depth of 4 feet. Apply by trenching, or by trenching and rodding into the trench. Treat outside of foundation and around all piers and pipes. In areas where physical obstructions exist that prevent trenching, such as concrete walkways adjacent to the foundation, apply by rodding alone. Where soil type and/or conditions make trenching impossible, apply by rodding. When the top of the footing is exposed, treat the soil adjacent to the footing to a depth not to exceed the bottom of the footing. In order to establish a complete exterior perimeter treatment zone, drilling and sub-slab treatment will be necessary wherever adjoining concrete structures exist such as patios, porches or sidewalks. If situations are encountered where the soil will not accept the full application volume recommended in the use directions below, read and follow the direction in the "Application Rates for Termiticide Use" section of this label.

- Rod holes and trenches must not extend beneath the bottom of the footing.
- Space the rod holes no more than 12 inches apart in a manner which will create a continuous treated zone.
- Trenches need not be wider than 6 inches and must be a minimum of 6 inches deep or to the bottom of the footing. When trenching in sloping or tiered soil, the trench must be stepped to ensure adequate distribution and to prevent Taurus SC from running out of the trench. Mix the finished dilution into the soil before replacing it into the trench.

Garages: Attached garage floors should be treated

Sub-slab injection: Sub-slab injection treatments can be made from inside the garage, or in cases where this is not possible, from the outside of the structure by drilling through the foundation as directed below. Before treatment, locate and identify all heating or air conditioning vents and ducts, water and sewer plumbing lines, electrical lines and conduits, and avoid contamination or damage to these structural elements.

Vertical drilling / injection: Make treatments under the slab by drilling vertically through the slab along the interior perimeter of the garage foundation. Drill holes along all concrete expansion joints, cracks, plumbing and utility services penetrating the slab. Drill holes along interior partition walls when there is clear evidence of termite activity or damage. Space all drill-holes no more than 12 inches apart in a manner which will create a continuous treated zone. Inject the finished dilution of Taurus SC into the drill-holes at a rate of 4 gallons per 10 linear feet per foot of depth. When making applications, use a lateral dispersal nozzle to achieve the best results. After treatment, all holes in commonly occupied areas must be plugged with a non-cellulose material or covered with an impervious, non-cellulose material such as Portland cement.

Horizontal drilling / rodding / sub-slab injection from the exterior of the garage foundation: Use this technique to treat underneath the slab only when interior design do not allow for treatment by vertical drilling. Care must be taken not to rod into heating or air conditioning vents and ducts, water and sewer plumbing lines, electrical lines and conduits. Use horizontal short rodding practices to create a continuous treated zone along the inside perimeter of the foundation. Angle drill-holes through the outside of the foundation to ensure deposition of Taurus SC below any existing heating ducts, water and sewer lines, or electrical conduits. Use horizontal long rodding practices only when the areas to be treated underneath the slab are not accessible by vertical rodding or horizontal short rodding. Do not use long rods exceeding 20 feet. For all horizontal rodding applications space drill-holes no more than 12 inches apart in a manner which will create a continuous treated zone. Inject the finished dilution of Taurus SC into the drill-holes at rate of 4 gallons per 10 linear feet per foot of depth. All holes must be plugged with a non-cellulose material or covered by an impervious, non-cellulose material such as Portland cement.

LOCALIZED INTERIOR TREATMENT

As part of a complete treatment, targeted interior applications may be made to vulnerable areas such as around plumbing or utility services penetrating floors, bath and / or shower traps, or along concrete expansion joints or settlement cracks.

If know termite activity exists in areas inside living spaces or in non-living spaces (such as crawl spaces, plenums etc.) of the structure, a localized interior treatment must be made at the immediate vicinity of the termite activity and radiating out at least 2 feet from the site in two or more directions.

Hollow Block Foundations / Voids

When termite activity is evident in or in the vicinity (within 2 feet) of hollow block foundations or voids in masonry resting on the footing, drill the wall adjacent to the evidence, if not openly accessible, and inject the finished dilution of Taurus SC into the void at a rate of 2 gallons per 10 linear feet of footing using a nozzle of 25 p.s.i. or less. This localized interior treatment to hollow block must be made at the site of the termite activity and to areas above the termite activity. Treatment must be applied radiating out at least 2 feet in two or more directions from the site of activity or along the wall pier or support post. Use of foam will maximize dispersion. When using this treatment, drill access hole below the sill plate as close as possible to the footing as is practical.

Applicators must examine the treated areas of voids in block or rubble foundation walls closely for possible runoff as a precaution against application leakage. Mechanical alteration to some areas may be required before a treatment can be made. Other areas may not be treatable.

All leaks resulting during the application of Taurus SC in locations other than those prescribed on this label must be cleaned up before leaving the application site. Do not allow people or pets to come in contact with contaminated areas or allow them to reoccupy the treatment site until the clean up is completed.

The drilled holes in commonly occupied areas must be plugged with a non-cellulose material or covered by an impervious, non-cellulose material such as Portland cement.

Bath Traps

If termite activity is evident within 2 feet of a bath trap, exposed soil or soil covered with tar or a similar sealant around plumbing and / or drainpipe entry areas must be treated. Tar or sealant may have to be removed to ensure adequate soil penetration. Install an access door or inspection portal if one is not already present. After all wood and cellulose debris is removed, treat the soil by rodding or drenching with a minimum of 1 gallon to a maximum of 4 gallons of finished dilution of Taurus SC per square foot.

Shower Drains

If termite activity is evident within 2 feet of a shower drain, soil beneath and adjacent to the drain must be treated. Drill through the slab adjacent to the shower drain and apply the finished dilution of Taurus SC by sub-slab injection to the soil below. Multiple access points may be drilled adjacent to the drain. Use of foam will maximize dispersion. Use of a directional dispersion tip will further enhance the treatment of the soil beneath the drain. Treat the soil with a minimum of 1 gallon but no more than 4 gallons of finished dilution per shower drain. Horizontal rodding can also be used to access and treat soil associated with a shower drain.

Retreatment Instructions

Annual retreatment of a structure is prohibited. Retreatment for subterranean termites can only be performed under the following circumstances:

1. There is clear evidence of re-infestation.
2. There is disruption of the treated zone due to construction, excavation, or landscaping and / or there is evidence of the breakdown of termiticide treated zone in the soil.

Treat these vulnerable or re-infested areas using a spot, partial or complete treatment in accordance with the application techniques described in this label. The timing and selection of retreatment type will vary depending on such factors as termite pressure, soil types and conditions, and other factors which may reduce the effectiveness of the treated zone.

POSTS, POLES, WOODEN LANDSCAPE ORNAMENTATION

Do not contaminate wells or cisterns.

For preventative treatment: Create a continuous treatment zone in the soil around wooden posts, poles, fence posts, signs and landscaping ornamentation. Apply the finished dilution of Taurus SC at the rate of 4 gallons per 10 linear feet per foot of depth. When performing the treatment at the time of installation, the finished dilution may be applied to the soil as it is replaced around the pole or post. The application

should place termiticide to a depth of 6 inches below the bottom of posts, poles or other wooden objects in contact with soil.

For a curative treatment: Treat previously installed wooden posts, poles, fence posts, signs and landscaping ornamentation with the finished dilution of Taurus SC by sub-surface injection or by gravity flow through holes made at the bottom of a trench around posts and poles. When trenching, the trench need not be wider than 6 inches and should be 6 inches deep. When sub-surface injecting, treat all sides to create a continuous treatment zone. Apply termiticide to a depth of 6 inches below the bottom of the wood.

TERMITES ABOVE GROUND

For Control of Termite Aerial Colonies or Drywood Termites

To treat localized areas of wooden structures, apply the finished dilution of Taurus SC to wooden members / voids. To treat inaccessible areas, drill and inject the finished dilution into the damaged wood of void spaces with a crack and crevice injector. Foam application can also be made into void spaces. To treat termite carton nests in trees or building voids, inject the finished dilution of Taurus SC using a pointed injection tool. Multiple injection points to varying depths may be necessary. Physically remove carton nest material from building voids when such nests are found.

After treatment, the applicator is required to check for leaks resulting in the deposition of Taurus SC in locations other than those prescribed on this label. When found, this material must be cleaned up before leaving the application site. Do not allow people or pets to come in contact with contaminated areas or allow them to reoccupy the treatment site until the clean up is completed.

DO NOT TREAT FRUIT- OR NUT-BEARING TREES.

DIRECTIONS FOR USE TO CONTROL PERIMETER PESTS

USE RESTRICTIONS:

- Only applicators wearing the personal protective equipment required by this product label may be in the area during application.
- Do not treat within a distance of 1 foot out from the dripline of edible plants.
- Do not contaminate public or private water supplies.
- Do not apply to wasp or hornet nests if they are not attached to or within the structure.
- Do not make treatments during times of precipitation.
- Do not allow residents, children, other people or pets into the treatment area until sprays have dried. After treatment, the applicator is required to check for leaks resulting in the deposition of treatment dilution in locations other than those prescribed in this label. When found, this material must be cleaned prior to leaving the application site. Do not allow people or pets to contact contaminated areas or to reoccupy contaminated areas of the structure until clean up is completed.
- Do not spray air conditioning units or intake vents.
- Do not use indoors except for application into wall voids.
- Do not exceed the maximum of two applications per year.
- Do not apply to playground equipment and pet quarters.
- Do not apply to applications to runoff or drip from treated surfaces.
- Do not apply to boat houses, including their piers or pilings.

- Do not apply within 5 feet of wells or cisterns.
- Do not apply to French drains or other permeable drainage.
- Doors and windows adjacent to application site must be closed during surface application.
- Do not apply within 15 feet of bodies of fresh water; lakes, reservoirs, rivers, permanent streams, marshes, natural ponds and commercial fish ponds. A 15- foot buffer of uniform groundcover must exist between application zone and bodies of fresh water (uniform ground cover is defined as land which supports vegetation of greater than 2 inches in height throughout).
- Do not apply within 60 feet of estuarine bodies of water. Estuarine water bodies are brackish, tidal water bodies such as bays, mouths of rivers, salt marshes and lagoons.

PERIMETER PEST TREATMENT

Use Taurus SC to kill and to provide residual control of the following pests:

Ants (acrobat, Argentine, big-headed, carpenter, crazy, odorous, pavement, pharaoh, and thief)

Use Taurus SC to kill the following pests:

Asian lady beetles, darkling beetles

Australian, Oriental, and smoky brown cockroaches

Black widow, brown recluse, cellar, and hobo spiders

Box-elder bugs, pill bugs

Brown and dog ticks

Centipedes

Cluster flies

European earwigs

House crickets

Millipedes

Paper wasps*

Silverfish

Yellow jackets

* Taurus SC is not a knockdown agent.

Mixing Instructions

For perimeter pest treatments mix a 0.06% spray dilution of Taurus SC by filling the treatment tank 1/4 to 1/3 full with water, then add 0.8 fluid ounces of Taurus SC. The filling hose must be equipped with an anti-backflow device or the water flow must include an air gap to protect against back siphoning. Add more water to the tank while agitating to 1 gallon of finished dilution.

Apply 0.06% of finished Taurus SC dilution as a low-pressure spray to the exterior of the structure where listed pests enter, trail around the structure or where they crawl and hide. Also apply around any exterior openings where listed pests could enter the structure such as around doors, windows, vents, pipes, foundation cracks or drilled holes. Make sure to treat the joint where exterior siding (wood, vinyl, aluminum or other similar materials) meets the cement, brick or block foundation. Treat anywhere electrical, cable or telephone wires enter the house. This treatment should be made as a general surface spray, crack and crevice spray, or a wall void application. Taurus SC may be applied as a foam treatment into wall voids to kill and / or control the above listed pests.

Apply 2 quarts of 0.06% finished spray of Taurus SC per 160 linear feet.

Refer to the "Foam Application" section of this label for specific foam mixing and application instructions.

Except for foam applications made into wall voids, application is limited to an area 1 foot out from and 1 foot up from where the ground meets the foundation. Do not exceed a maximum of 2 applications per year.

Nests found on the ground within 1 foot of the foundation may be treated.

Vegetation touching the structure may offer a route for the entry of ants into the structure without coming into contact with the treatment; therefore, remove or prune away any shrubbery, bushes, and tree branches touching the structure.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

Storage

Store unused product in original container only, out of reach of children and animals.

Pesticide Disposal

Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

Container Disposal

Nonrefillable Container: Do not reuse or refill this container. Triple rinse or pressure rinse container (or equivalent) promptly after emptying; then offer for recycling, if available, or reconditioning, if appropriate, or puncture and dispose of in a sanitary landfill, or by incineration, or by other procedures approved by state and local authorities.

Triple rinse containers small enough to shake (capacity ≤ 5 gallons) as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container 1/4 full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank, or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

Pressure rinse as follows: Empty the remaining contents into application equipment or mix tank. Hold container upside down over application equipment or mix tank, or collect rinsate for later use or disposal. Insert pressure rinsing nozzle in the side of the container and rinse at about 40 PSI for at least 30 seconds. Drain for 10 seconds after the flow begins to drip.

In case of minor spills or leaks, soak up with sand, earth or other suitable material and dispose of as pesticide waste.

WARRANTY STATEMENT

Control Solutions, Inc. warrants that this product conforms to the chemical description on the label thereof and is reasonably fit for purposes stated on such label only when used in accordance with directions under normal use conditions. It is impossible to eliminate all risks inherently associated with use of this product. Crop injury, ineffectiveness, or other unintended consequences may result because of such factors as weather conditions, presence of other materials, or the manner of use or application, all of which are beyond the control of Control Solutions, Inc. To the extent consistent with applicable law, Control Solutions, Inc. shall in no event be liable for consequential, special, or indirect damages resulting from the use or handling of this product. All such risks shall be assumed by the Buyer. In addition to the foregoing, no purchaser of this product (other than an end user) shall be entitled to any reimbursement for any loss suffered as a result of any suspension or cancellation of the registration for this product by the U.S. Environmental Protection Agency. Except, as expressly provided herein and to the extent consistent with applicable law, Control Solutions, Inc. makes no warranties, guarantees, or representations of any kind, either expressed or implied, or by usage of trade, statutory or otherwise, with regard to the product sold, including, but not limited to merchantability, fitness for a particular purpose, use or eligibility of the product for any particular trade usage. The exclusive remedy of any buyer or user of this product for any and all losses, injuries, or damage resulting from or in any way arising from the use, handling, or application of this product, whether in contract, warranty, tort, negligence, strict liability, or otherwise, shall be damages not exceeding the purchase price paid for this product or, at Control Solutions, Inc. election, the replacement of this product.

Optional Marketing Language:

- 78 oz. makes 100 gallons (for use on 78 oz container)
- 20 oz. makes 25 gallons (for use on 20 oz container)
- Contains Fipronil, the same active used in Termidor® SC

***Taurus™ SC is not manufactured by or distributed by BASF. Termidor® SC is a registered trademark of BASF.*